

Pneumatic pumps for the supply of low and medium viscosity oils and antifreeze for the use in mobile kits or in pipeworks.

**STANDARD SERIES**

**3:1**



Single acting - 16.7 l/min

Art.no. **2071**  
**Oil**



Double acting - 23.7 l/min

Art.no. **2030**  
**Oil**




Double acting - 23.7 l/min

Art.no. **2020**  
**Oil**  
Art.no. **2020130**  
**Oil IBC 1000 l**




Single acting - 16.7 l/min

Art.no. **2073**  
**Oil**  
Art.no. **2074**  
**Pure antifreeze**

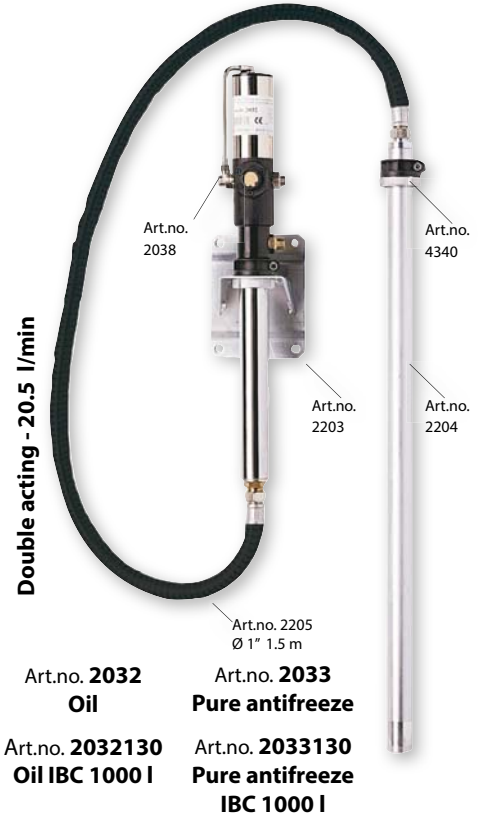

Double acting - 20.5 l/min

Art.no. **2038**  
**Oil**  
Art.no. **2033**  
**Pure antifreeze**  
Art.no. **2032130**  
**Oil IBC 1000 l**  
Art.no. **2033130**  
**Pure antifreeze IBC 1000 l**

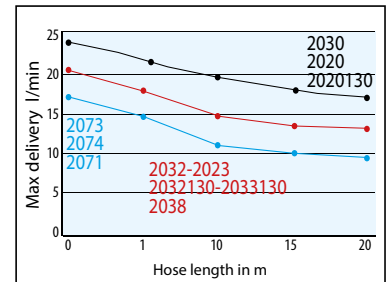

See accessories on pages 49-51 and 62-71!

Art. no.	2030	2020	2020130	2073 2074	2032 2033	2032130 2033130	2038	2071
Compressed air supply	Pressure min 2 - max 8 bar (30 - 120 psi)							
Compression ratio	3:1							
Outlet pressure	24 bar (350 psi)							
Delivery	23.7 l/min			16.7 l/min		20.5 l/min		16.7 l/min
Connection compressed air	1/4" BSP (F)							
Connection lubricant outlet	1/2" BSP (M)							
Max air consumption with 8 bar pressure	210 l/min							
Length suction tube	750 mm	950 mm	1300 mm	950 mm		1300 mm	380 mm	176 mm
Diameter suction tube	40 mm							
Suitable for drums of	60 l	208 l	1000 l	208 l		1000 l	Any	Any
Weight	5 kg	6 kg	6.2 kg	9 kg	5.2 kg	5.4 kg	4.5 kg	3.7 kg
Dimensions (LxWxH) (mm)	95x95x1070	95x95x1270	95x95x1500	95x95x1270	95x95x530	95x95x1500	95x95x700	95x95x415



The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C - Compressed air pressure 8 bar - free flow outlet.